


In accordance with

ISO 10133 Third Edition 2012-12-15:


“7.11 All D.C. negative conductors shall be identified by black or yellow insulation. If the craft is equipped with an A.C electrical system, yellow insulation shall be used for D.C negative conductors of the D.C. system”

*In small craft with mixed A.C. & D.C. environments,
D.C. negative conductors must use yellow insulation.*

Positive (+)

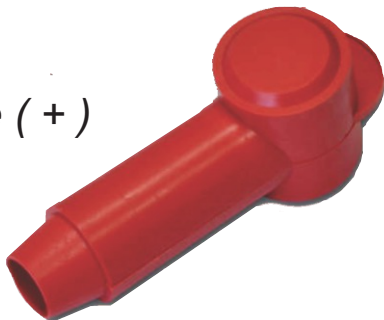

Negative (-)

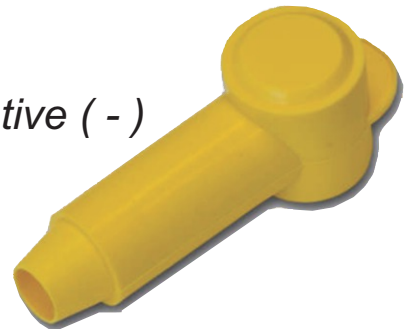

Note 1:

In accordance with IEC 60446, conductor insulator colours of the A.C. system are:

- Live conductors: black or brown;*
- Neutral conductors: white or light blue;*
- Protective conductors: green or green with a yellow stripe*

In small craft with only D.C. environments,

D.C. negative conductors may use yellow insulation or black insulation.

Positive (+)



Negative (-)

